




Well Valve

PN 16
DIN 2533
DN40...DN600



橡胶法兰软接头 Rubber Expansion Joint(Flange)

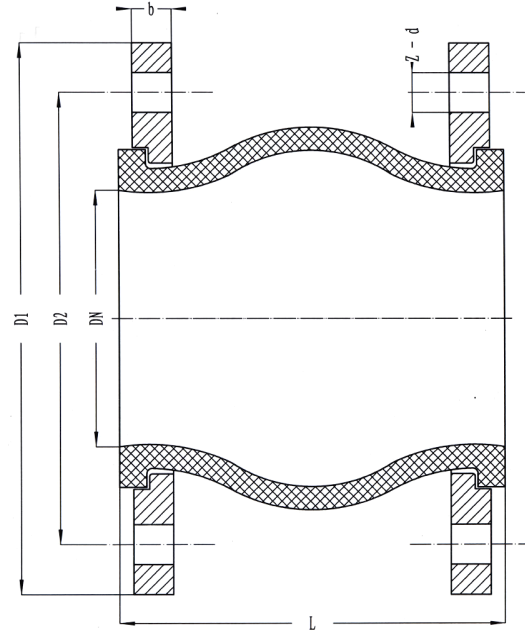

TEMPERATURE/PRESSURE

°C	20	60	90
PN	16	10	5.5

APPLICATIONS

- Hot and cold water systems
- Fluid excluding acid

MATERIALS

BODY	NBR
FLANGE	Carbon steel

Structure

DN	L	D	D1	b	Z-φb	Deflexion Angle	KG
40	95	150	110	16	4-18	15	3.40
50	105	165	125	18	4-18	15	4.47
65	115	185	145	18	4-18	15	5.23
80	130	200	160	20	8-18	15	6.65
100	135	220	180	20	8-18	15	7.20
125	170	250	210	22	8-18	15	10.03
150	180	285	240	22	8-23	15	12.91
200	205	340	295	24	12-23	15	18.70
250	240	405	355	26	12-27	15	23.32
300	260	460	410	26	12-27	15	29.00
350	265	520	470	28	16-27	15	39.00
400	265	580	525	32	16-30	15	47.60
450	265	640	585	38	20-30	15	55.18
500	265	715	650	38	20-33	15	68.40
600	265	840	770	38	20-36	15	137.60

Suqian Well Valve Co., Ltd

www.wellvalve.com

Email:wellvalve@wellvalve.com

TEL:+86 518 85477138 FAX:+86 518 85457833