




**Well Valve**

PN 25  
 DIN 3201/1-F5  
 DIN 2501  
 DN40...DN300

铸钢暗杆法兰硬密封闸阀(DIN)  
 CAST STEEL NON-RISING STEM WEDGE GATE VALVE(DIN)

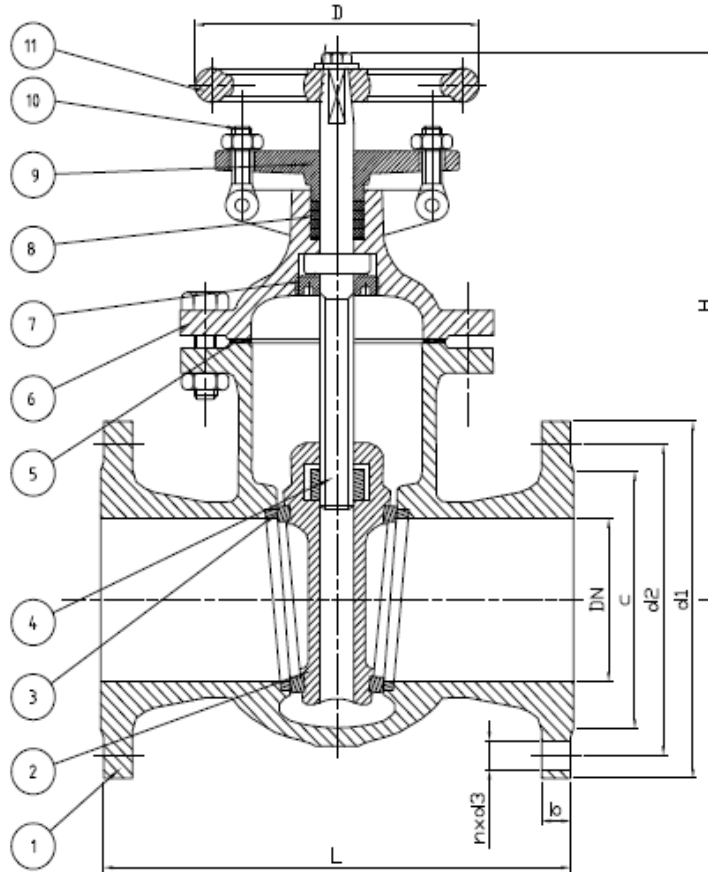

TEMPERATURE/PRESSURE			
°C	-10...+120	300	425
PN	25	17	12

APPLICATIONS
•Hot and cold water systems
•Fluid excluding acid

MATERIALS		
1	BODY	WCB
2	WEDGE	WCB
3	CLACK SEAT	SS304
4	STEM	1Cr13
5	GASKET	GRAPHITE+SS304
6	BONNET	WCB
7	BACK SEAT	1Cr13
8	PACKING	GRAPHITE
9	PACKING BUSHING	1Cr13
10	EYEBOLT NUT	35#
11	HANDWHEEL	35#

**Structure**

DN	L	d1	d2	c	b	nxd3	H	KG
40	240	150	110	88	18	4-18	280	16
50	250	165	125	102	20	4-18	310	24
65	270	185	145	122	22	8-18	370	32
80	280	200	160	138	24	8-18	415	48
100	300	235	190	162	24	8-22	480	60
125	325	270	220	188	26	8-26	540	85
150	350	300	250	218	28	8-26	576	124
200	400	360	310	278	30	12-26	670	173
250	450	425	370	335	32	12-30	810	268
300	500	485	430	395	34	16-30	868	365

**Suqian Well Valve Co., Ltd**

www.wellvalve.com    Email:wellvalve@wellvalve.com    TEL:+86 518 85477138    FAX:+86 518 85457833