




Well Valve

PN 16/10
DIN 3230
DIN 2501/1
DN40...DN300



法兰球型止回阀 BALL CHECK VALVE (FLANGE)

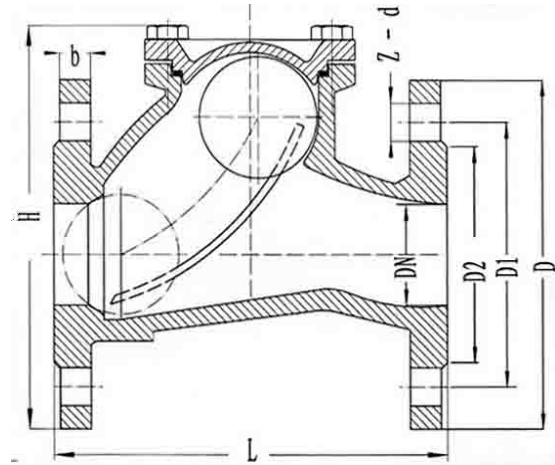

TEMPERATURE/PRESSURE

°C	-10...+80	90
PN 16/10	16	10

APPLICATIONS

- Hot and cold water systems
- Fluid excluding acid

MATERIALS

PART NAME	MATERIAL
BODY	GG25/GGG40/GGG50
BONNET	GG25/GGG40/GGG50
BALL	GG25/GGG40/GGG50 RUBBER COVERED
SEAL RING	NBR

Structure

DN	L	D	D1	D2	b	Z-φb	H	KG
40	180	150	110	88	16	4-19	175	7
50	200	165	125	102	18	4-19	203	8
65	240	185	145	122	18	4-19	216	12
80	260	200	160	138	20	8-19	241	15
100	300	220	180	158	20	8-19	292	22
125	350	250	210	184	20	8-19	330	34
150	400	285	240	212	22	8-23	356	45
200	500	340	295	268	24	8-23	495	80
250	600	395	350	320	26	12-23	622	130
300	700	445	400	370	26	12-23	698	200

Suqian Well Valve Co., Ltd

www.wellvalve.com

Email: wellvalve@wellvalve.com

TEL: +86 518 85477138 FAX: +86 518 85457833